

Cover profile carrier - APT-ME - 3034358

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)

Cover profile carrier for mounting on NS 35/7.5 DIN rail for attaching the cover profile AP-ME




Why buy this product

- The APT-ME holder serves as a partition plate or intermediate support bracket for long terminal strips



Key Commercial Data

Packing unit	10 STK
Minimum order quantity	10 STK
GTIN	 4 046356 324700
GTIN	4046356324700

Technical data

Dimensions

Length (b)	138 mm
Width (a)	2.2 mm
Height (c)	69 mm

Ambient conditions

Ambient temperature (operation)	-40 °C ... 115 °C
---------------------------------	-------------------

General

Color	gray
Flammability rating according to UL 94	V2
Material	PA
Result	Test passed
Flame test method (DIN EN 60695-11-10)	V0
Oxygen index (DIN EN ISO 4589-2)	>32 %
Class I	2

Cover profile carrier - APT-ME - 3034358

Technical data

General

Class F	2
Surface flammability (ASTM E 162)	passed
Specific optical density of smoke (ASTM E 662)	passed
Smoke gas toxicity (SMP 800C)	passed
Heat dissipation calorimetric (ASTM E 1354)	28 MJ/kg
R22	HL 1 - HL 3
R23	HL 1 - HL 3
R24	HL 1 - HL 3
R26	HL 1 - HL 3

Standards and Regulations


Flammability rating according to UL 94	V2
Fire protection for rail vehicles (DIN EN 45545-2) R22	HL 1 - HL 3 HL 1 - HL 3 HL 1 - HL 3 HL 1 - HL 3
Fire protection for rail vehicles (DIN EN 45545-2) R23	HL 1 - HL 3 HL 1 - HL 3 HL 1 - HL 3 HL 1 - HL 3
Fire protection for rail vehicles (DIN EN 45545-2) R24	HL 1 - HL 3 HL 1 - HL 3 HL 1 - HL 3 HL 1 - HL 3
Fire protection for rail vehicles (DIN EN 45545-2) R26	HL 1 - HL 3 HL 1 - HL 3 HL 1 - HL 3 HL 1 - HL 3

Environmental Product Compliance

China RoHS	Environmentally friendly use period: unlimited = EFUP-e
	No hazardous substances above threshold values

Drawings

Dimensional drawing

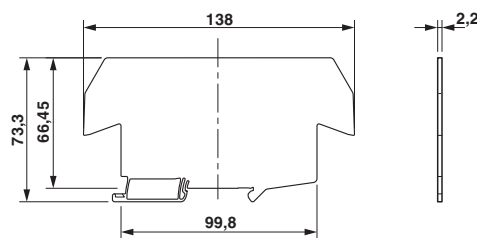

Phoenix Contact 2018 © - all rights reserved
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG
 Flachsmarktstr. 8
 32825 Blomberg
 Germany
 Tel. +49 5235 300
 Fax +49 5235 3 41200
<http://www.phoenixcontact.com>