

# **SPECIFICATION**

Part No.	:	CGGP.18.4.C.02
Product Name	:	18mm Ceramic GPS/GLONASS Patch Antenna, 1575-1610MHz
Features	:	Wide-band Operation 18mm*18mm*4mm
		3dBi Peak Gain (on 70mm*70mm ground-plane)
		Pin type
		Automotive TS16949 Production and Quality
		Approved
		RoHS compliant





#### **1.Introduction**

This 18mm ceramic GPS/Glonass patch antenna, by means of a double resonance design, has unique wide-band operation over the whole operating bands of GPS and Glonass systems from 1575MHz to 1610MHz. It is mounted via pin and double-sided adhesive.

This antenna has been tuned for a centre position on a 70mm\*70mm ground-plane. It is manufactured and tested in a TS16949 first tier automotive approved facility. For further optimization to customer specific device environments where positioning is off centre or on different ground-plane sizes, custom tuned patch antennas can be supplied. For more details please email <u>sales@taoglas.com</u>

### 2. Specification


ELECTRICAL				
Range of Receiving Frequency	GPS: 1575.42±1.023MHz GLONASS: 1602±5MHz			
Center Frequency	1592MHz ± 3MHz			
VSWR	2.4 max			
Gain at Zenith	+3.0 dBi typ.			
Impedance	50 ohms			
MECHANICAL				
Ceramic Dimension	18mm x 18mm x 4mm			
Pin Diameter	0.9mm			
Pin Length	1.8mm			
ENVIRONMENTAL				
Operation Temperature	-40°C to 85°C			
Humidity	Non-condensing 65°C 95% RH			

\* Antenna properties were measurement with the antenna mounted on 70\*70mm Ground Plane Taoglas Part # CGGPD.18.C



#### 3. Antenna S11 Properties - 1592 MHz Typical Return


Loss, SWR, Impedance, measured on the test fixture

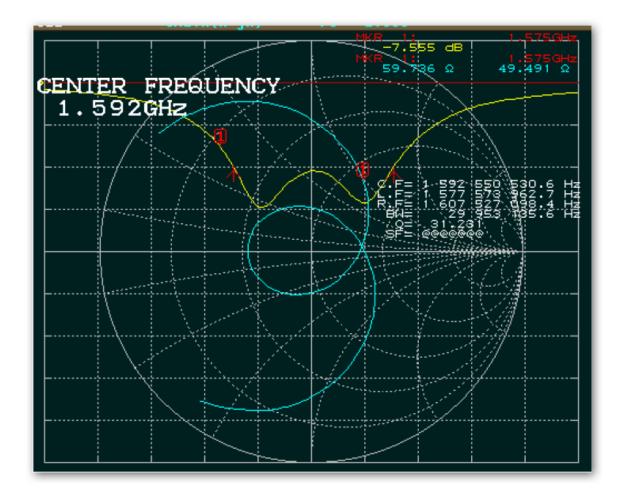




#### **4. Antenna Radiation Properties**

#### 4.1. XZ – Plane Radiation

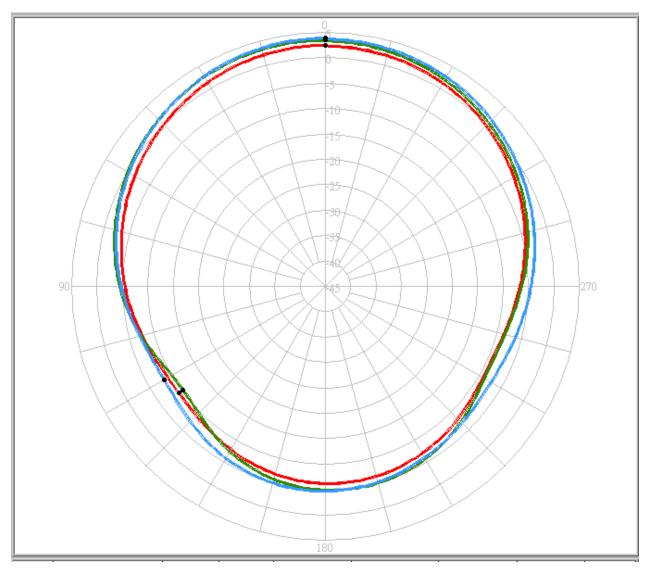

Item	XZ-plane			
1575 MHz	2.49 dBi			
1592 MHz	3.47 dBi			
1608 MHz	3.85 dBi			



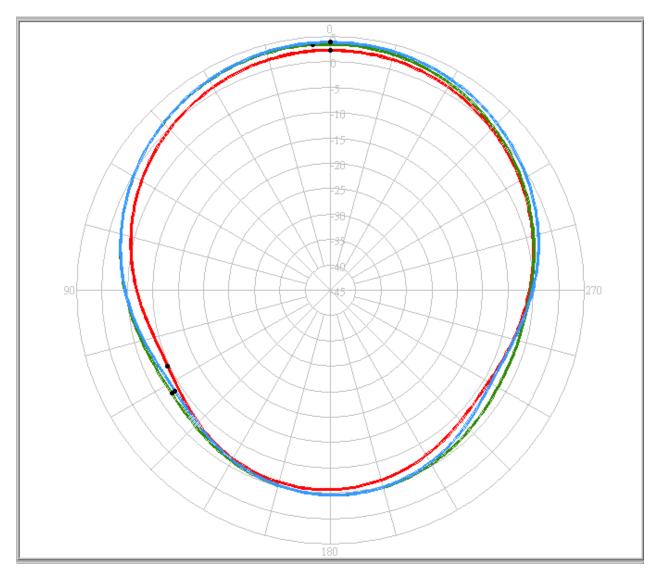


#### 4.2. YZ- Plane Radiation

Item	YZ-plane				
1575	2.33 dBi				
1592	3.49 dBi				
1608	3.88 dBi				




### **5. Mechanical Drawing**

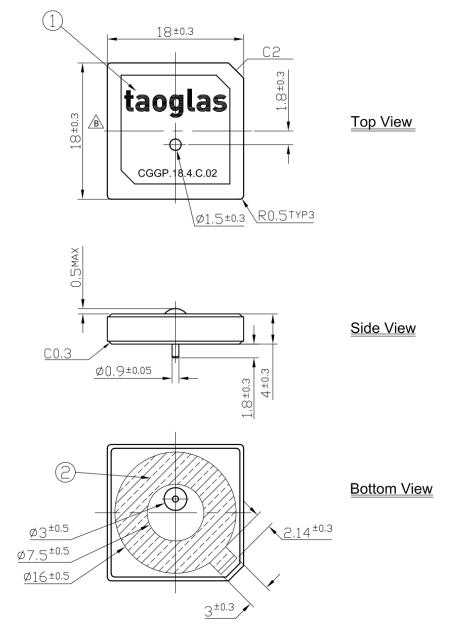

	Name	Material	Finish	QTY	NOTES:
1	CGGP.18 Patch 18x18x4	Ceramic	Clear	1	1.Double sided adhesive area.
2	Double sided Adhesive	NITTO 5015	White Liner	1	




#### **5.1 Adhesive Thickness**

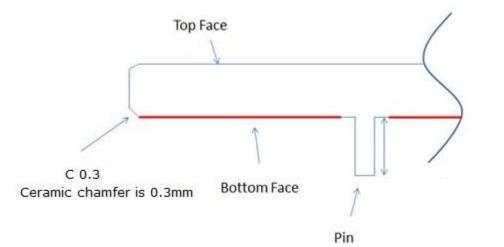

Red Line shows the adhesive without Liner – thickness 0.08~0.1mm




# 6. Evaluation Board (CGGPD.18.C)

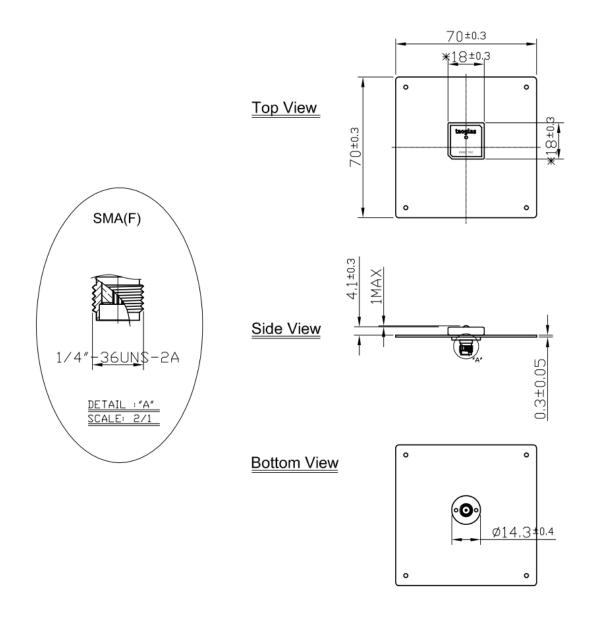

	Name	Material	Finish	QTY
1	Patch(18x18x4mm)	Ceramic	Clear	1
2	Ground-Plane(70x70x0.3mm)	Brass	Silver	1
3	SMA(F) ST	Brass	Gold	1




### **7.PCB Footprint Recommendation**

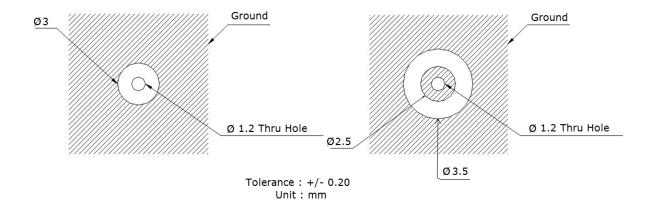



## 8. Packaging

#### 8.1. Inner Tray

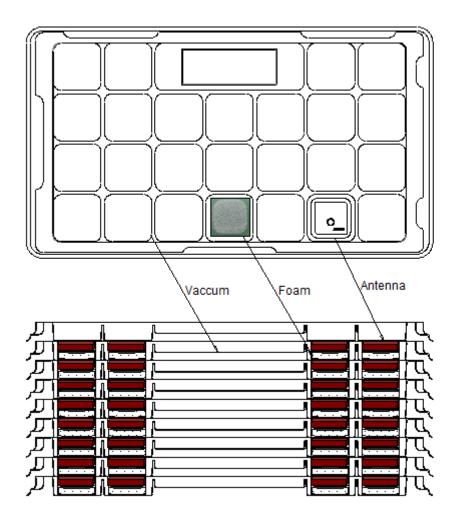

25 pieces per tray200 pieces per inner carton

800 pieces per outer carton



#### 8.2. Carton

